

ENERGY PRODUCTS PTE LTD

No. 21 Bukit Batok Crescent #17-74, WCEGA Tower, Singapore 658065
 Tel: 6745 4301 Fax: 6745 4757
 Email: sales@energyproducts.com.sg www.energyproducts.com.sg ROB Reg No. 201628875M



Safety

Signage

Signage for Safety Shower and Eye/Face Wash for all areas required

SPECIFICATIONS	
Item	Details
H-EWS	EYEWASH SIGN METAL 300X255MM SINGLE SIDE WALL MOUNTED
H-SSS	SAFETY SHOWER SIGN METAL 300X255MM DOUBLE SIDED WITH BRACKETS
H-ESS	SAFETY SHOWER/EYEWASH SIGN METAL 300X400MM DOUBLE SIDED BRACKETS
H-EWSP	EYEWASH SIGN POLY 140X140MM SINGLE SIDE WALL MOUNTED OR CABLE TIED
H-SSSP	SAFETY SHOWER SIGN POLY 140X140MM SINGLE SIDE WALL MOUNTED OR CABLE TIED
H-ESSP	SAFETY SHOWER/EYEWASH SIGN POLY 280X140MM SINGLE SIDE WALL MOUNTED OR CABLE TIED

**The Poly Signs are Single Sided and are provided for Wall Mounted Or Cable Tied.
 PLEASE ADVISE UPON ORDER**

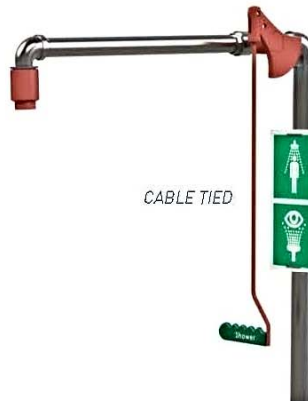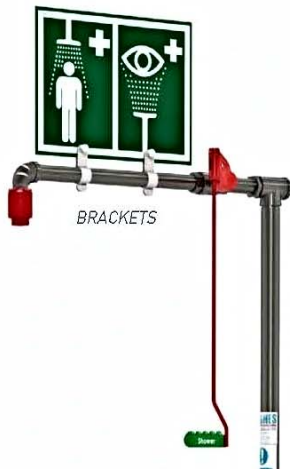

For any enquiries, Please contact ENERGY PRODUCTS PTE LTD at Tel: (65) 6745 4301 Fax: (65) 6745 4757 Email: sales@energyproducts.com.sg

ENERGY PRODUCTS PTE LTD

No. 21 Bukit Batok Crescent #17-74, WCEGA Tower, Singapore 658065
 Tel: 6745 4301 Fax: 6745 4757
 Email: sales@energyproducts.com.sg www.energyproducts.com.sg ROB Reg No. 201628875M

Safety

EYE/FACE WASH

ESSENTIAL RANGE

Item Code	Description
H-D5016	FLOOR MOUNTED GALVANISED POWDER COATED INDOOR EMERGENCY SAFETY SHOWER WITH OPTIONAL STAINLESS STEEL EYE/FACE WASH UNIT.

ANSI compliant model ideal for use in indoor applications not subject to the possibility of freezing or overheating.

Delivers the ANSI recommended 76 litres per minute of potable water from the shower and 12 litres per minute to the eye/face wash.

OPTIONAL EXTRA ATTACHMENTS	
Item Code	Description
H-DA002	BOWL AND DRAIN ASSEMBLY FOR GALVANISED COMBINATION SAFETY SHOWER AND EYE/FACE WASH SUITS H-D5016
H-DA003	GRP RED FOOT CONTROL PANEL ASSEMBLY FOR EYE FACE WASH ACTIVATION SUITS H-D5016, H-D5017 & H-D5020
H-DA004	ADDITIONAL ROSE / ABS SHROUD COVER FOR DRENCH SHOWER SUITS H-D5016 & H-D5017 - GRP SPRAY NOZZLE REMAINS



Shown with optional eye/face wash bowl (Part No. H-DA002)Foot treadle (Part no. H-DA003)

Shown with optional eye/face wash bowl (Part No. H-DA002)Foot treadle (Part no. H-DA003) ABS Shroud Cover over spray Nozzle (Part no. H-DA004)

For any enquiries, Please contact ENERGY PRODUCTS PTE LTD at Tel: (65) 6745 4301 Fax: (65) 6745 4757 Email: sales@energyproducts.com.sg

ENERGY PRODUCTS PTE LTD

No. 21 Bukit Batok Crescent #17-74, WCEGA Tower, Singapore 658065
 Tel: 6745 4301 Fax: 6745 4757
 Email: sales@energyproducts.com.sg www.energyproducts.com.sg ROB Reg No. 201628875M

Safety

INDOOR COMBINATION SAFETY SHOWERS AND EYE/FACE WASH ECONOMY RANGE

Item Code	Description
H-D5017	FLOOR MOUNTED STAINLESS STEEL INDOOR EMERGENCY SAFETY SHOWER WITH OPTIONAL STAINLESS STEEL EYE/FACE WASH UNIT.

ANSI compliant model ideal for use in indoor applications not subject to the possibility of freezing or overheating.

Delivers the ANSI recommended 76 litres per minute of potable water from the shower and 12 litres per minute to the eye/face wash.

OPTIONAL EXTRA ATTACHMENTS

H-DA001	BOWL AND DRAIN ASSEMBLY FOR SS COMBINATION SAFETY SHOWER AND EYE/FACE WASH SUITS H-D5017
H-DA003	GRP RED FOOT CONTROL PANEL ASSEMBLY FOR EYE/FACE WASH ACTIVATION SUITS H-D5016, H-D5017 & H-D5020
H-DA004	ADDITIONAL ROSE / ABS SHROUD COVER FOR DRENCH SHOWER SUITS H-D5016 & H-D5017 - GRP SPRAY NOZZLE REMAINS



Shown with optional eye/face wash bowl (Part No. H-DA001) Foot treadle (Part no. H-DA003)

Shown with optional eye/face wash bowl (Part No. H-DA001) Foot treadle (Part no. H-DA003) ABS Shroud Cover over spray Nozzle (Part no. H-DA004)

For any enquiries, Please contact ENERGY PRODUCTS PTE LTD at Tel: (65) 6745 4301 Fax: (65) 6745 4757 Email: sales@energyproducts.com.sg

ENERGY PRODUCTS PTE LTD

No. 21 Bukit Batok Crescent #17-74, WCEGA Tower, Singapore 658065
Tel: 6745 4301 Fax: 6745 4757
Email: sales@energyproducts.com.sg www.energyproducts.com.sg ROB Reg No. 201628875M

Safety

WALL MOUNTED/PEDESTAL MOUNTED STAINLESS STEEL 304 EYE/FACE WASH

ECONOMY RANGE

Item Code	Description
H-D5020	OPEN BOWL WALL MOUNTED 304 STAINLESS STEEL EYE/FACE WASH WITH POLY SIGN

Open stainless steel bowl, wall-mounted emergency eye/face wash featuring twin spray nozzles protected by dust covers which lift off upon activation via the push plate. The Inbuilt flow regulator valve guarantees an optimum water flow. The eye wash diffusers are fitted with fine mesh strainers designed to give a gentle flow of aerated water at 12 litres per minute as per the ANSI standard.

This unit is intended for indoor use but can be located outdoors where there is no risk of overheating.

PEDESTAL MOUNTING OPTIONS AVAILABLE

Item Code	Description
H-D5020CP	OPEN BOWL WALL MOUNTED 304 STAINLESS STEEL EYE/FACE WASH COMPLETE WITH PP SIGN AND SS 304 PEDESTAL
H-D5020CP6	OPEN BOWL WALL MOUNTED 304 STAINLESS STEEL EYE/FACE WASH COMPLETE WITH PP SIGN AND GRP PEDESTAL
H-DA003	GRP RED FOOT CONTROL PANEL ASSEMBLY FOR EYE/FACE WASH ACTIVATION SUITS H-D5016, H-D5017 & H-D5020



For any enquiries, Please contact ENERGY PRODUCTS PTE LTD at Tel: (65) 6745 4301 Fax: (65) 6745 4757 Email: sales@energyproducts.com.sg

ENERGY PRODUCTS PTE LTD

No. 21 Bukit Batok Crescent #17-74, WCEGA Tower, Singapore 658065
Tel: 6745 4301 Fax: 6745 4757
Email: sales@energyproducts.com.sg www.energyproducts.com.sg ROB Reg No. 201628875M

Safety

SELF-CONTAINED GRAVITY FED EYEWASH

FEATURES

- A wall mounted, self-contained eye wash unit providing 15 minutes of water flow
- Emergency First-Aid water treatment for work sites without plumbing capabilities
- Large filling cap makes for easy filling, cleaning and inspection whilst the retractable tray protects against airborne contaminants
- High visibility colour provides quicker identification for a casualty in distress
- Meets ANSI and EN standards

MATERIALS OF CONSTRUCTION

MAIN BODY AND PULL DOWN	High density polyethylene
WALL BRACKET	Galvanised mild steel
NOZZLES	Polypropylene
STANDARD FINISH	Green and Orange
WATER CAPACITY	34 litres
MINIMUM FLOW	1.5 litres/minute minimum (0.4 US Gallons)
MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F)
MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
EYE/FACE WASH OPERATION	Pull down tray
DIMENSIONS (WxDxH)	580mm (18.9in) x 250mm (9.8in) x 400mm (15.7in)
WEIGHT (NO OPTIONS)	4kg

SELF-CONTAINED EYEWASH

Item Code	Description
H-P400	Portable Gravity Fed Eyewash 34L
H-P400TJ	Thermal Protection Jacket for H-P400
H-HCPP60	Hydroclenz Bacteriostatic Sachet for 34L



For any enquiries, Please contact ENERGY PRODUCTS PTE LTD at Tel: (65) 6745 4301 Fax: (65) 6745 4757 Email: sales@energyproducts.com.sg

ENERGY PRODUCTS PTE LTD

No. 21 Bukit Batok Crescent #17-74, WCEGA Tower, Singapore 658065
 Tel: 6745 4301 Fax: 6745 4757
 Email: sales@energyproducts.com.sg www.energyproducts.com.sg ROB Reg No. 201628875M

Safety

This Sterile, buffered, isotonic Solution has a Twist off, tamper evident cap with up to a 4-year Shelf Life. It is designed to flush the eyes of contaminates to provide a first response to eye and wound irrigation. The functional wall station endures the eyewash is always nearby, accessible and easily seen. The wall mounted model comes with the eyewash diffuser cup that fit comfortably over the eye and ensures an even flow of flushing solution.

EYEWASH SOLUTION BOTTLES

Item Code	Description	Packed Dimensions
EWB947	947ML EYEWASH BOTTLE OPTO-PHARM	9x10x30cm - 1kg
EWB947/12	947ML EYEWASH BOTTLE OPTO-PHARM BOX OF 12	25x32x28cm - 12.5kg
WMB947	947ML EYEWASH BOTTLE OPTO-PHARM SINGLE WALL MOUNTED	9x10x30cm - 1.1kg
WMB947/12	947ML EYEWASH BOTTLE OPTO-PHARM SINGLE WALL MOUNTED BOX OF 12	36x40x30cm - 13.2kg



DECONTAMINATION SHOWERS

12 or 16 nozzle portable decontamination shower

Item Code	Description
H-300 12E	12 nozzle portable decontamination shower
H-300 16E	16 nozzle portable decontamination shower

A 12 or 16 nozzle portable decontamination shower designed to be both lightweight and robust. Ideal for use by Civil and Military Fire Services, Chemical and Petrochemical Industries, Armed Services and Civil Defence Units, the unit can be quickly deployed in cases of major chemical, biological and nuclear incident in less than a minute.

The 11" lay-flat Red Dura-line hoses form four shower legs, each of which is fitted with four spray nozzles. Once erected and coupled to a free appliance, water is admitted to the apparatus and the hoses become rigid under pressure, adopting a curved form to give 360° decontamination. The rugged carrying case duals as an effective base platform, the design of which is a lay-flat host assembly, complete with non-slip raised platform.



For any enquiries, Please contact ENERGY PRODUCTS PTE LTD at Tel: (65) 6745 4301 Fax: (65) 6745 4757 Email: sales@energyproducts.com.sg